

# Yamaha Performance Bulletin

YPB#: PB\_SDC\_NX25\_F250XCA\_3-31-10\_OCC

Test Date: 3/31/10



Note: Boat shown with optional out-board power.



## Sundance® NX25®

Length	25'
Beam	8' 6"
Dry Weight (Boat Mfr. Published)	2,730 lbs.
Maximum HP	300 hp
Fuel Capacity	72 gals.
Weight as Tested (Approximate)	3,950 lbs.



Boat Manufactured By:

Sundance Boats • 6131 Sundance Road • Blackshear, GA 31516  
912-449-0033 • www.sundanceboats.com

## Yamaha F250XCA

Horsepower	250
Displacement	4.2 L
Weight (Catalog Published)	558 lbs.
Gear Ratio	1.75

## Engine Mounting Height

Mounting Hole Position	#3
Anti-Ventilation Plate Height	1" Above Bottom

## Propeller

Series	Saltwater Series II
Diameter/Pitch	15-1/2 x 17
Yamaha Part #	6D0-45978-00-00
Propeller Material	Polished Stainless Steel

## Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	75° / 68°
Elevation	Sea Level
Wind Velocity	0-5 MPH


Comments: Test weight includes 1/2 tank of fuel, one battery, T-top, safety and test equipment. Fuel consumption data gathered with Yamaha Command Link® fuel management system. Zero-to-30 speed data gathered with Yamaha speedometer. Other speed data gathered with GPS receiver.

**Note to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies of their products are for identification purposes only, and are not intended to be an endorsement.

## Performance Data

RPM	MPH	GPH	MPG
1000	6.1	1.2	5.08
1500	7.5	2.0	3.75
2000	10.1	2.9	3.48
2500	16.0	4.1	3.90
<b>3000</b>	<b>25.5</b>	<b>5.5</b>	<b>4.64</b>
3500	30.4	7.0	4.34
4000	35.1	9.4	3.73
4500	39.8	12.6	3.16
5000	43.0	16.7	2.58
5500	46.0	20.5	2.24
<b>5900</b>	<b>51.0</b>	<b>24.3</b>	<b>2.10</b>

Seconds to Plane	2.87
Seconds 0-30 MPH	4.49

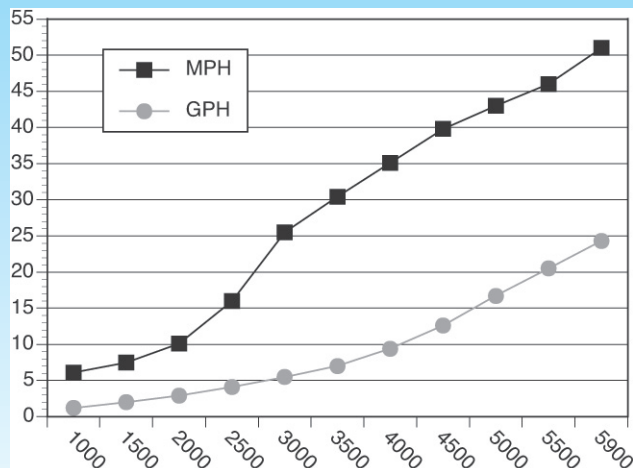

Test performed and verified by Yamaha Application Engineers.

### For More Information:

Yamaha Motor Corporation, U.S.A. • OEM Division, Marine Group  
1270 Chastain Road NW • Kennesaw, GA 30144 • (800) 88-YAMAHA  
For other Performance Bulletins, visit [www.yamaha-motor.com](http://www.yamaha-motor.com).

© 2009 Yamaha Motor Corporation, U.S.A. All rights reserved.